

# Surface Mount Bandpass Filter

## BPF-A1600+

50Ω 1400 to 1800 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HQ1157

### The Big Deal

- Wide bandwidth
- Better rejection
- Miniature shielded package

### Product Overview

The BPF-A1600+ is a 50Ω bandpass filter fabricated using SMT technology. This bandpass filter covers from 1400-1800 MHz. This filter is built with high Q capacitors and air-coil inductors for superior performance. This filter is developed for square kilometer array telescope systems for radio astronomy. It has repeatable performance across lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications such as radio astronomy.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics for broad frequency band.
Shielded case	Reduced interference with and from the surrounding components.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

## BPF-A1600+

50Ω 1400 to 1800 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HQ1157

### Features

- Wide bandwidth
- Better rejection
- Miniature shielded package

### Applications

- Radio telescope applications
- Public cellular networks (GSM)
- International mobile telecommunication
- Weather instruments / Radar / Satellite

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	1600	—	MHz	
	Insertion Loss	F1-F2	1400-1800	—	3.0	4.0	dB
	VSWR	F1-F2	1400-1800	—	1.5	1.9	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-1220	20	30	—	dB
	VSWR	DC-F3	DC-1220	—	11	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	1980-3300	20	30	—	dB
	VSWR	F4-F5	1980-3300	—	5.0	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

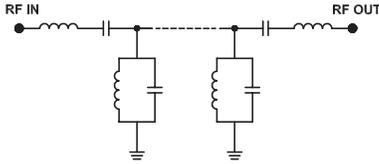

### Typical Frequency Response







### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	102.63	1737.18	1400	3.79
750	51.91	31.60	1420	3.35
1220	36.36	12.35	1440	3.09
1280	18.19	10.50	1460	2.93
1315	9.62	6.26	1480	2.81
1340	4.67	2.92	1500	2.69
1370	2.12	1.21	1520	2.60
1400	1.75	1.27	1540	2.54
1500	1.57	1.39	1560	2.51
1600	1.60	1.38	1600	2.53
1700	1.76	1.22	1620	2.57
1800	2.45	1.11	1630	2.60
1845	5.02	1.96	1650	2.65
1875	10.23	3.61	1670	2.70
1930	23.49	7.83	1690	2.76
1980	35.53	11.38	1700	2.80
2200	51.78	20.95	1730	2.98
2760	53.52	29.96	1760	3.30
3010	54.45	32.18	1780	3.64
3300	47.40	34.07	1800	4.11

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

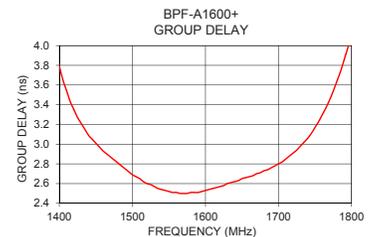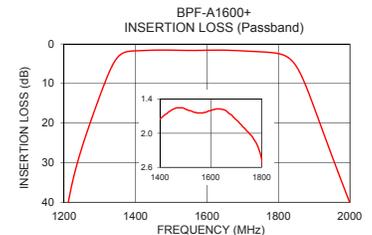

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.B  
M174392  
BPF-A1600+  
EDU1657  
URJ  
190717  
Page 2 of 3

## Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7,9,10,11,12,13,14

**Demo Board MCL P/N: TB-363+**  
**Suggested PCB Layout (PL-227)**

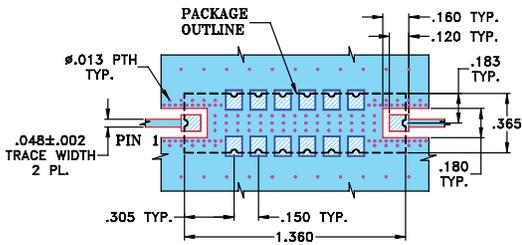


### NOTE:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

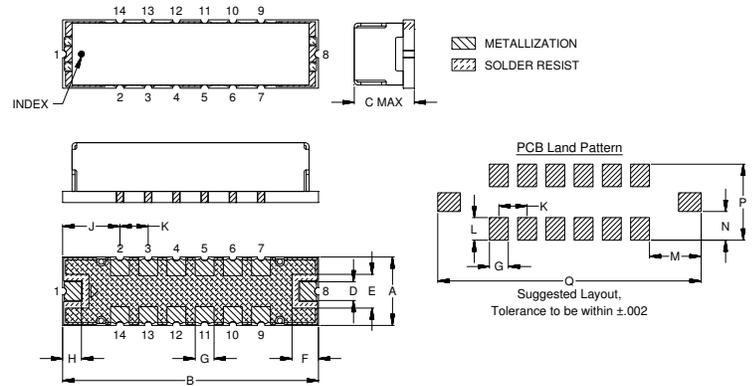

## Outline Dimensions ( inch )

A	B	C	D	E	F	G	H
.365	1.360	.35	.100	.180	.140	.100	.100
9.27	34.54	8.89	2.54	4.57	3.56	2.54	2.54
J	K	L	M	N	P	Q	Wt.
.305	.150	.120	.275	.152	.405	1.400	grams
7.75	3.81	3.05	6.99	3.86	10.29	35.56	4.0

*Note: Please refer to case style drawing for details*

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)