


Schottky Diode

V_{RRM} = 8 V
 I_{FAV} = 40 A
 V_F = 0.28 V


High Performance Schottky Diode
 Low Loss and Soft Recovery
 Single Diode

Part number

DSS40-0008D

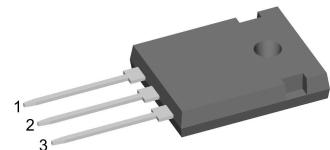

Backside: cathode



Features / Advantages:

- Very low V_F
- Extremely low switching losses
- Low I_{rm} values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

Applications:

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Schottky


Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			8	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			8	V
I_R	reverse current, drain current	$V_R = 8 V$ $V_R = 8 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 100^\circ C$		70 1250	mA
V_F	forward voltage drop	$I_F = 40 A$ $I_F = 80 A$ $I_F = 40 A$ $I_F = 80 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		0.37 0.49 0.28 0.43	V
I_{FAV}	average forward current	$T_C = 130^\circ C$ rectangular $d = 0.5$	$T_{VJ} = 150^\circ C$		40	A
V_{F0} r_F	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ C$		0.10 3.8	V mΩ
R_{thJC}	thermal resistance junction to case				0.8	K/W
R_{thCH}	thermal resistance case to heatsink			0.25		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ C$		155	W
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 V$	$T_{VJ} = 45^\circ C$		1.00	kA
C_J	junction capacitance	$V_R = 1 V$ f = 1 MHz	$T_{VJ} = 25^\circ C$		13.1	nF


Package TO-247

Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	<i>RMS current</i>	per terminal			70	A
T_{VJ}	<i>virtual junction temperature</i>		-55		150	°C
T_{op}	<i>operation temperature</i>		-55		125	°C
T_{stg}	<i>storage temperature</i>		-55		150	°C
Weight				6		g
M_d	<i>mounting torque</i>		0.8		1.2	Nm
F_c	<i>mounting force with clip</i>		20		120	N

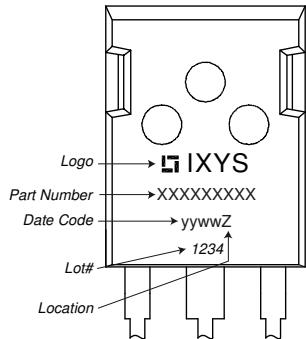
Product Marking


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSS40-0008D	DSS40-0008D	Tube	30	500482

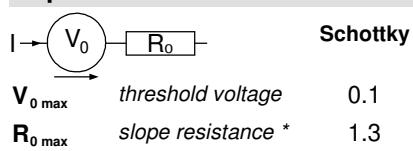Equivalent Circuits for Simulation
* on die level
 $T_{VJ} = 150^\circ\text{C}$

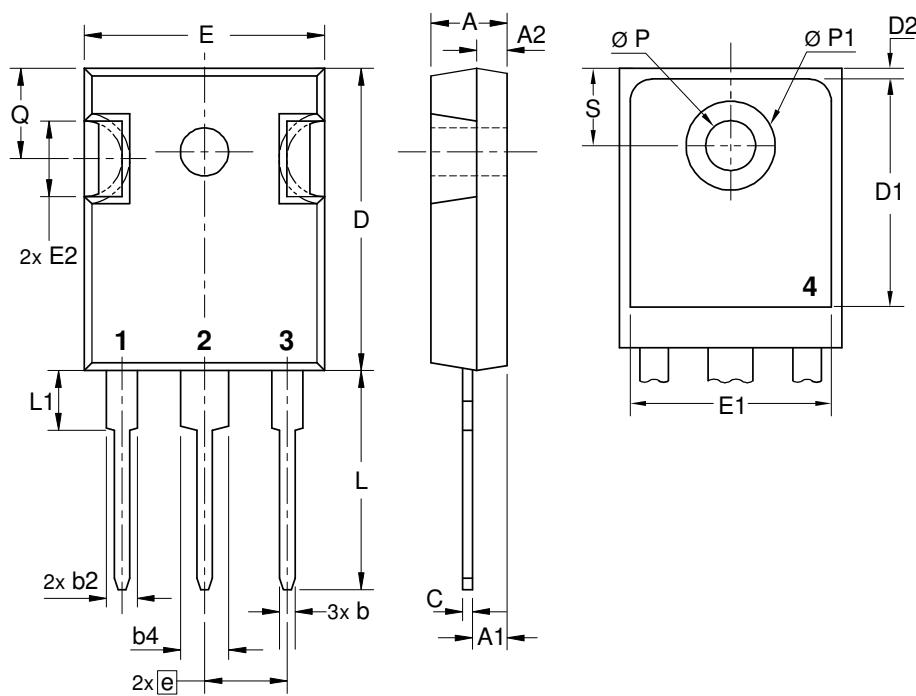
Outlines TO-247


Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
Ø P	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
Ø P1	- 0.29	- 7.39



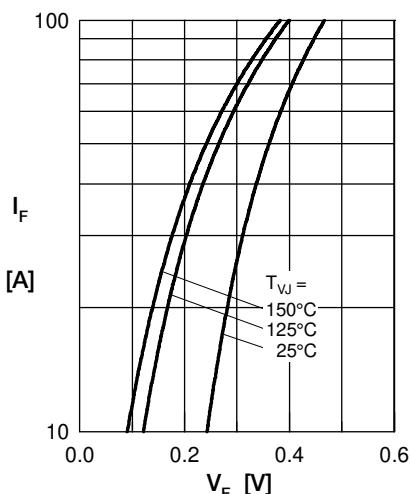
Schottky


Fig. 1 Max. forward voltage drop characteristics

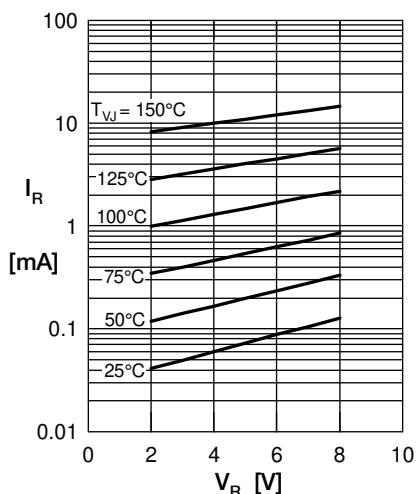


Fig. 2 Typ. reverse current I_R vs. reverse voltage V_R

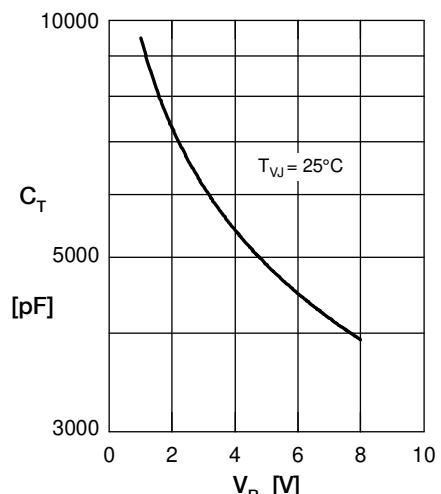


Fig. 3 Typ. junction capacitance C_T vs. reverse voltage V_R

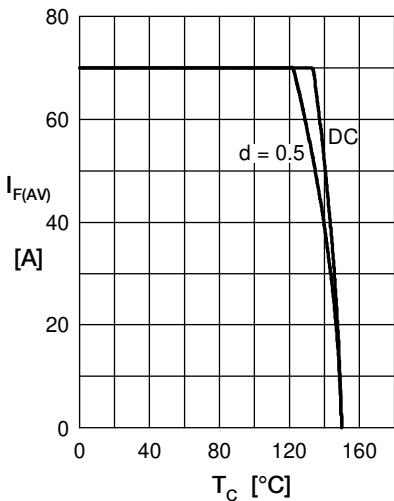


Fig. 4 Average forward current $I_{F(AV)}$ vs. case temp. T_C

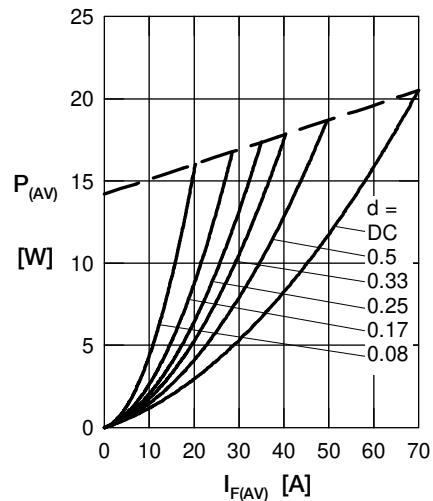


Fig. 5 Forward power loss characteristics

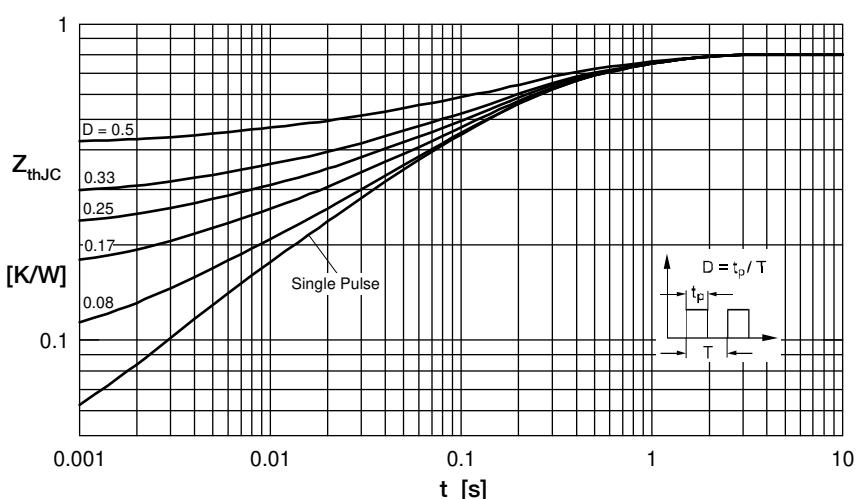


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode